




COLORS



Lights that are not designed to be covered with a thermal insulating material.

angles of beams are represented by their colors on the plan and stickers on spots

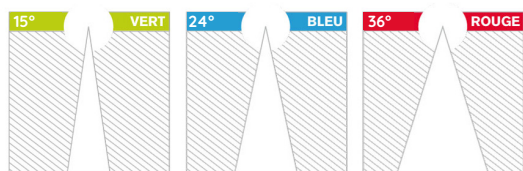

Luminous flux	P lum	P syst
SUN+3000	690 lm	12W
SUN+4000	690 lm	12W
IRC+2700	750 lm	12W
IRC+3000	950 lm	12W
IRC+4000	950 lm	12W
TC3000	1200 lm	12W
TC4000	1200 lm	12W

Description



Black diffuser to ensure excellent anti-glare performance.

Deep inner ring construction with lighting protection angle >30° and UGR < 13


Material: Aluminum Alloy



RECESS - TRIMLESS - ADJUSTABLE

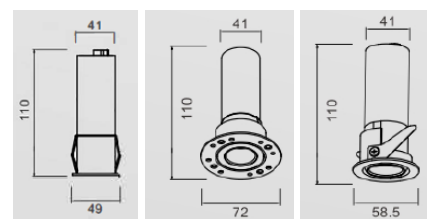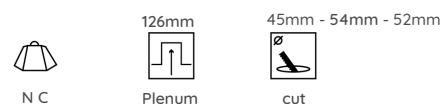

Option :



fast connectors



IP 20



230V
50Hz

850°