




COULEURS



Les angles des faisceaux sont représentés par des couleurs sur le plan et des gommettes sur les spots

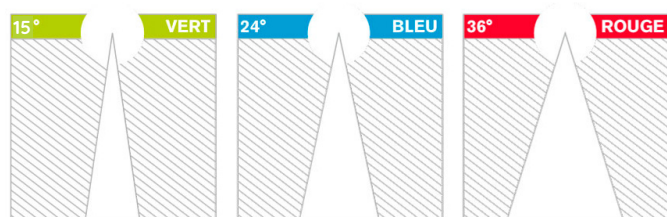

Flux lumineux	P lum	P syst
HP 830	3506lm	24W
HP 840	3653lm	24W
HP TC3000	3110lm	24W
HP TC4000	3346lm	24W
HP IRC+3000	2558lm	24W
HP IRC+4000	2896lm	24W
HP IRC+2700	2466lm	24W
THP 830	4294lm	34W
THP 840	4474lm	34W
THP TC3000	3999lm	34W
THP TC4000	4302lm	34W
THP IRC+3000	3289lm	34W
THP IRC+4000	3723lm	34W
THP IRC+2700	3171lm	34W
TTHP 830	4838lm	38W
TTHP 840	5042lm	38W
TTHP TC3000	4235lm	38W
TTHP TC4000	4557lm	38W
TTHP IRC+3000	3785lm	38W
TTHP IRC+4000	4073lm	38W
TTHP IRC+2700	3339lm	38W

Un investissement économique réduit

Une conception frugale

Aluminium de fonderie

Un éclairage de qualité

81 solutions lumière : 9 LED, 3 faisceaux,

3 puissances

Eblouissement réduit,

Faisceau maîtrisé avec un réflecteur aluminium

50 000h L70B20

Une maintenance optimisée

LED et driver 100% retrofittable

Vitre anti-poussière


Accès rapide à l'électronique



355°



1,32kg

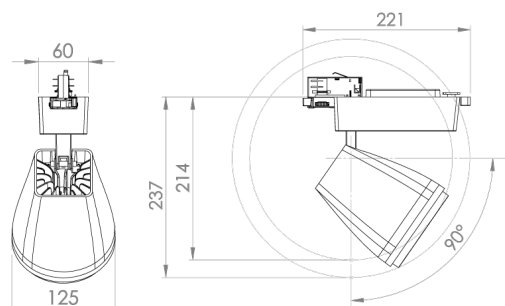

IP 20



230V
50Hz

850°