

FERRARE LED


CHEMIN LUMINEUX



COULEUR




- Corps en aluminium extrudé
- Refroidisseur passif
- Polycarbonate
- Module LED jusqu'à 8000 Lm
- IRC jusqu'à 85
- T° de couleur : 2700K, 3000K, 4000K et 5000K
- Durée de vie 50 000 heures

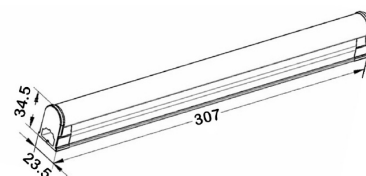


Alim
driver intégré


<1 Kg




connectique rapide

FLUX	longueur	PUISSANCE	T° DE COULEUR	IRC	par ligne Nbre max
430/470	307 mm	5 W	3000 - 4000K	85	20
840/900	568 mm	9 W	3000 - 4000K	85	15
1190/1270	868 mm	12 W	3000 - 4000K	85	12
1500/1600	1168 mm	15 W	3000 - 4000K	85	10
1740/1790	1438 mm	18 W	3000 - 4000K	85	8

Accessoires :

- Cordon d'alimentation 1800 mm
- Cordon de jonction 150/300/1200 mm

OPTIONS:


Dali touch dim



IP 20



CLASSE II

230V
50Hz



850°